

The *Original* PRE-FINISHED Steel Door Frames

NEW!
REDIFRAME-CL™
CASELESS FRAME
**MODERN, SLEEK,
AND STRONG.**

**Standard REDIFRAME-CL™
Caseless Frame Options:**

MATERIAL: 18 gauge cold rolled steel
(standard) and 18 gauge A40 Galvanneal

PROFILE: Single rabbet, double rabbet, or
cased opening

DOOR THICKNESS: For use with 1-3/8" or
1-3/4" thickness doors (steel or wood)

WALL SIZE: 4" to 12-1/4"

STOP HEIGHT: 5/8"

HINGE REINFORCEMENTS: Prepared for
standard or concealed hinges

FINISHING: White or grey primed, standard
colors, or custom colors available

STRIKE PREP: T-Strike, ASA prep, deadbolt






FIRE RATING: Mylar up to 90 minutes
neutral and positive pressure fire label;
wood or steel stud wall constructions.

REDIFRAME-CL™
Fire rated 90 min and
5-minute installation
are added benefits to
this sleek take on a
modern design

Introducing the latest frame in the
REDIFRAME family, the REDIFRAME-CL!
This caseless alternative features a modern
design with seamless edges.

Key Features:

- 5-minute installation
- No trim or casing required
- Easy "mud-in" installation, similar to a drywall corner
- Expanded steel corners for enhanced durability
- Options for standard or concealed hinges
- Fully customizable for virtually any door or wall size

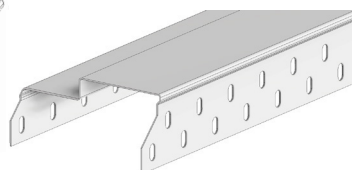

Scan to go directly to
REDIFRAME | REDIFLEX
product webpage!



DUNBARTON
CORPORATION
Your Complete Opening Solution

1101 Technology Drive | Dothan, Alabama 36303
800.633.7553 | 334.794.9184 fax
dunbarton.com | sales@dunbarton.com



Proudly made
in America