


REDIKIT™

PRE-HUNG ASSEMBLY

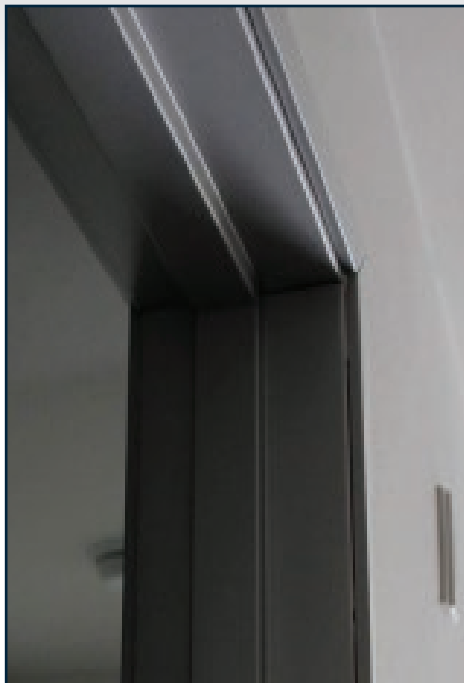

Dunbarton's REDIKIT™ is perfect for job sites requiring unassembled units or job sites supplying their own door!

- REDIFLEX® Adjustable Frames*
- Threshold
- Weatherstrip
- Fire-rated up to 90 minutes
- Easy-to-install frame has 1" of adjustment


***Standard REDIFLEX® Options Include:**

- 18 gauge (standard) and 20 gauge Cold-Rolled Steel or 16, 18, or 20 gauge A40 Galvanneal
- Special hinge or strike location
- Standard and custom colors

REDIKIT™ Includes:


Base Kit

- (1) hinge side base
- (1) strike side base
- (1) header base
- (1) sill/threshold
- (1) installation instructions
- (1) kerf foam weatherstrip
- (1) Prehang bag:
 - (1) prehang bracket
 - (2) #6 x 1/2" TEK screw, zinc (frame side)
 - (2) #6 x 3/4" pan head truss screw (door side)
 - (4) #6 x 1-1/2" pan head Phillips type 17 face frame screw (vinyl riser screws)
 - (1) prehang bracket installation instructions
- (1) Accessory bag:
 - (1-1/2 pair) 4 x 5/8" radius hinges (brass plain bearing)
 - (14) #10-24 x 1/2" machine screws (brass)
 - (16) #10-24 wood screws (brass)
 - (2) corner seals
 - (5) self-adhesive corrugated spacers
 - (1) #10-24 x 1/2" machine screw (zinc)
 - (2) 3/4" wood screws (zinc)



Closure Kit

- (2) upright closures
- (1) header closure
- (1) aluminum extender (if requested)
- (1) 3-in-1 hardware bag:
 - (1) 2-3/4" "T" strike package with screws (brass)
 - (1) deadbolt strike package with screws (brass)
 - (1) deadbolt cover (Ivory, Bright White, RFBrown, Prime Gray) with brass screws
 - (2) #10 x 1-1/2" flat head Phillips head screw (zinc)



Threshold


The purpose of a threshold is to close the gap between the bottom of a door and the floor. Thresholds are used with door bottoms and weatherstripping to seal the opening, preventing air, rain, and snow from entering. Dunbarton has four standard styles with two extenders for the fixed inswing, with other options available.

Frame height can be adjusted to accommodate the threshold height with a standard undercut door. Sweep height must be considered when determining the frame height, door height, and threshold height. For full threshold options, see your Dunbarton salesperson, or the Dunbarton website.




Weatherstrip

Dunbarton's 90-minute fire-rated weatherstripping is available in three colors: white, brown, and beige. The easy-to-install kerf weatherstripping comes ready to install on-site or is available pre-installed. Be sure to specify weatherstripping color when ordering frames.



Color Options



Scan to go directly to RediFit | RediKit product webpage!



DUNBARTON
CORPORATION
Your Complete Opening Solution

1101 Technology Drive | Dothan, Alabama 36303
800.633.7553 | 334.794.9184 fax
dunbarton.com | sales@dunbarton.com



Proudly made
in America